


Euro Wall Down Lite

Cat. No. EDL/L

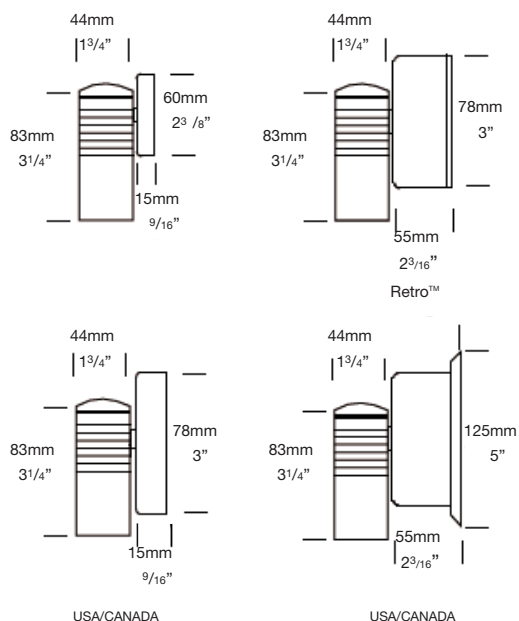

PURE LED
Pure Performance

The Euro Wall Down Lite is a wall-mounted luminaire with a fixed head to give a dramatic wash lighting effect on walls - it can be directed either downwards or upwards. Hunza Euro fixtures have a contemporary, discreet appearance but are still able to provide excellent illumination.

This luminaire is machined from natural copper or solid 316 stainless steel. It features an extra clear, low iron tempered flush lens and high temperature silicon gaskets.

The Hunza PURE LED system uses Cree MT-G 2 chips for maximum performance and long life. Power supply options include a choice of integral 12 or 120/240 volt (Retro) drivers. There is also an external remote (series connection) driver option. The PURE LED system incorporates Hunza's Plug and Play system for easy replacement of the LED engine. Four beam angles, and a choice of a Warm or Cool White colour temperatures are available.

*At 350mA this fixture is the equivalent of a 25watt halogen
*At 700mA this fixture is the equivalent of a 35watt halogen

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
EDL/L	S - Series D3 - 12v/350mA D7 - 12v/700mA D10 - 12v/1050mA R - 110 or 240v Retro	15 - 15° TIR Lens 25 - 25° TIR Lens 38 - 38° TIR Lens 60 - 60° TIR Lens	2 - 2700K 3 - 3000K 4 - 4000K 39 - 3000k (90+ CRI)	CJK150 - Cable Joint Kit EURF - Frosted Lens WBAP - Wall Box Adaptor	COP - Copper SS - 316 Stainless

Ordering Example: EDL/L S 15 3 CJK150 BK

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Copper

Body: 45.4mm (1¾") copper rod.
Base: Copper handspun 2mm (⅛")

Stainless Steel

Body: 45.4mm (1¾") 316 stainless steel rod.
Base: Investment cast and CNC machined.

Luminaire Weight

12 volt	Cop .465kg (1lb)
	SS .480kg (1lb 1oz)
Retro™	Cop .960kg (2lb 1oz)
	SS 1.035kg (2lb 4oz)

Features

Lens:

6mm (15/64") extra clear low iron flush fit shatter resistant glass.
Lifetime Warranty.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories:

Cable Joint Kit (Cat. CJK150)
Frosted Lens (Cat. EURF)
Wall Box Adaptor (Cat. WBAP)

Mounting

The luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 Junction boxes for USA /Canada.

Retro™ luminaire (110/240volt):
A mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED (per head)

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 600 lm at 1050mA

Lumens Per watt: 85 minimum

CRI Warm White (3000k): 85+

Colour Temp: 2,700, 3,000 or 4,000K

High CRI Option (3000K): 90+
(lumen output decreases by 15%)

Power Supply

Series (Remote) Driver (per LED)

Constant current driver
LED requirements: 6vdc at 1050mA maximum

Integral 12 Volt Driver


Hunza™ Plug and Play Driver
Input: 12vac, 14 watt total Output: 350 / 700 / 1050mA
(1050mA limited ≤ 40° ambient temperature in Stainless Steel)

Transformer


Hunza™ Wall Mount Transformer for use with integral 12 volt driver

Retro 110 or 240 Volt Driver
Hunza™ Retro Driver
Input: 120 or 240vac, 10 watt total
Output: 700mA
0-10 volt dimming
(USA - non dimming)


Reflector Beam Angles



15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K