



Bollard ULTRA

Cat. No. BOL/U

Cat. No. BOLFM/U

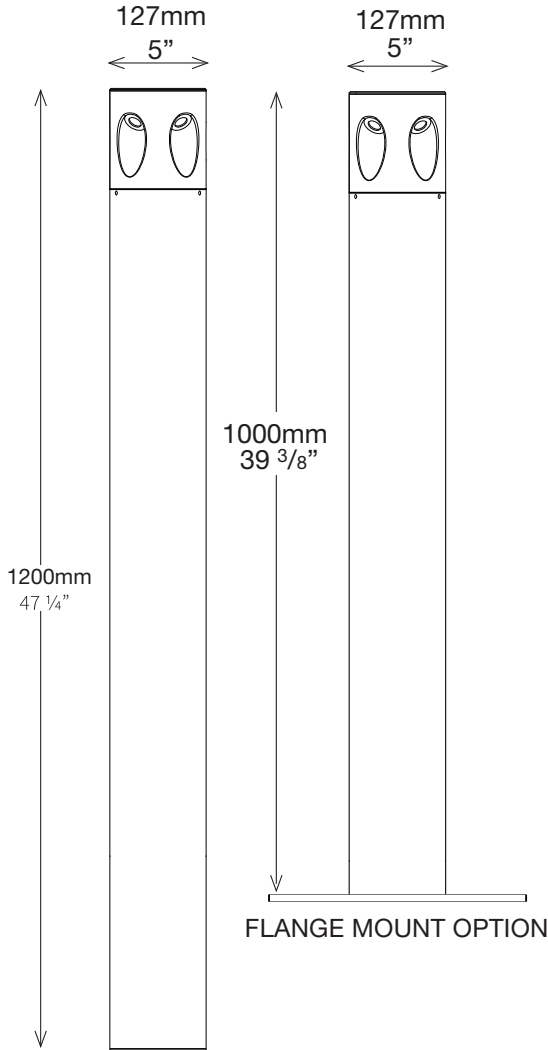

Flange Mount

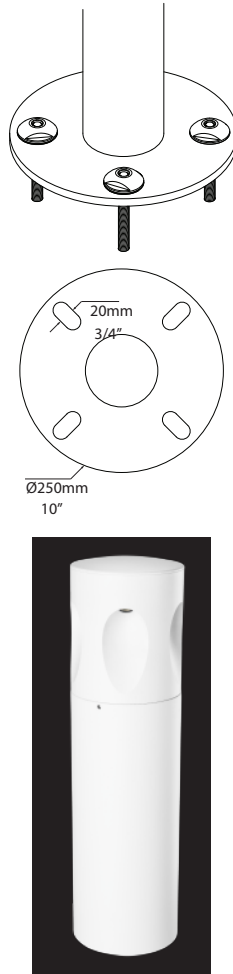

PURE LED
Pure Performance

The Bollard Ultra is ideal for commercial application for ground lighting on driveways, pathways and squares. It has a sleek and contemporary aesthetic that will enhance any architectural setting. This luminaire features multiple facets that cast a 3 or 5-petal pattern and low glare downward illumination. The light pattern is dependent on the beam angle specified.

The head of this luminaire is machined from solid aluminium mounted on aluminum tube, with an Epoxy layer then a UV stable powder coat. It features high temperature silicon gaskets.

The Bollard Ultra LED system uses the latest Cree XTE LED chips for maximum performance and long life. Power supply is from a 110/240v (Retro) drivers. There is also an external remote driver (series connection) option. The Ultra LED system incorporates an innovative Plug-and-Play system for easy replacement or upgrade of the LED engine.

Ordering Information

Luminaire	Driver	Beam Angle	Colour Temp	Accessories	Finish Colours
BOL/U	S - Series	15 - 15° TIR Lens	2 - 2700K	CJK150 - Cable Joint Kit	EBK - Black EDG - DarK Grey EWH - White ESTAR - Silver Star
BOLFM/U	R- 110 or 240V retro driver	25 - 25° TIR Lens	3 - 3000K		
		45 - 45° TIR Lens	4 - 4000K		
			39 - 3000K (90+ CRI)		

Ordering Example: BOL/U S 15 3 CJK150 EBK

HUNZATM PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Information

CNC machined from:

Head - 127mm (5") solid aluminium rod.

End cap - 127mm (5") solid aluminium rod.

Pole - 127mm (5") x 3.18mm (1/8") aluminium tube with chromate substrate finished with an Epoxy layer and a high UV resistant polyester "E" powder coat colours Black, Dark Grey, White, Silver Star.

Luminaire Weight

4kg (8lbs 13oz)

Features

Lens:

TIR lens with lifetime warranty.

Gasket

Silicone, iron impregnated 220°C (428°F)

Accessories

Cable Joint Kit (Cat. CJK150)

Mounting

Pole directly mounted into the earth or set in concrete.

Technical Information

Standards

IP66/IP67 UL 1598

LED

Cree XTE Plug-and-Play, field replaceable LED board.

Lumen Output: 1200 @ 1050mA

Lumens Per watt: 75 minimum

CRI Warm White (3000k): 85+

Colour Temp: 2700K, 3000K or 4000K

High CRI Option (3000K): 90+
(lumen output decreases by 15%)

Power Supply

Retro 110/240 volt Driver

HUNZA Plug and Play Driver

Input: 120/240 vac 16 watt

Output: 15vdc 1050mA

0-10 volt dimming


(USA - non dimming)

External (Series) Driver


Constant current driver

Output: 16vdc at 1050mA max.


Reflector Beam Angles (per facet)



15° TIR Lens



25° TIR Lens

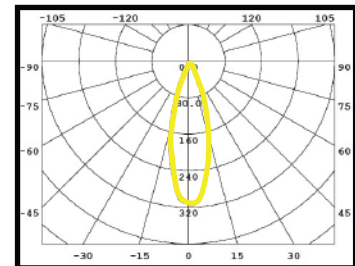

45° TIR Lens