


# Mini Bollard PURE LED

Cat. No. BOLMINI/L

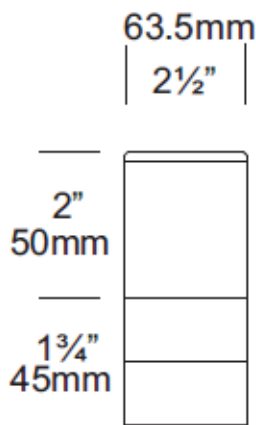

**PURE LED**  
Pure Performance

The Mini Bollard (95mm) PURE LED is ideal for garden edges. The acrylic lens reflects light at two angles through an anti-glare mesh downwards onto the ground and horizontally to illuminate the surrounding landscape.

Constructed of tubular aluminium with a UV stable powder coat or machined from solid copper or 316 stainless steel.

The Hunza PURE LED system uses Cree MTG-2 chips for maximum performance and long life. Power supply options include a choice of integral 12 or an external remote (series connection) driver. The PURE LED system incorporates Hunza's Plug-and-Play system for easy replacement or upgrade of the LED engine. A choice of a Warm or Cool White colour temperatures is available.

\*At 350mA this fitting is the equivalent of a 10w halogen fitting.

\*At 700mA this fitting is the equivalent of a 20w halogen fitting.

## Ordering Information

Luminaire	Driver mA	Colour Temp	Accessories	Material/Finish
BOLMINI/L	S - Series D3 - 12v/350mA D7 - 12v/700mA	2 - 2700K 3 - 3000K 4 - 4000K 39 - 3000K (90+ CRI)	BOLOP - Opaque Lens HOOD140 - Anti Glare Hood	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose Cop - Copper SS - 316 Stainless

Ordering Example: BOLMINI/L S 3 FM SS

**HUNZA**<sup>TM</sup> PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2014 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.

End cap - solid aluminium 63.5mm (2½") with chromate substrate and high UV resistant polyester powder coat colours

**Colour** Black, Bronze, Green, Silver Star, White, Birch, Dark Grey, Olive Green, Beige, Primrose.

**Copper** 63.5mm (2½") x 10mm (13/32").

End cap - solid copper 63.5mm (2½").

**316 Stainless Steel** 63.5mm (2½") x 9mm (11/32").

End cap - solid 316 stainless steel 63.5mm (2½").

### Luminaire Weight

Alum .37kg (1 3oz)

Cop .6kg (1lb 5oz)

SS .5kg (1lb 1oz)

## Features

### Lens

UV stable polycarbonate lens with anti-glare mesh and dual angle reflector projects light horizontally and at 45° onto the ground.

### Gasket

Silicone, iron impregnated 220°c (428°f)

### Accessories

Opaque Lens (Cat. LENSBOLOP)

Anti Glare Hood (Cat. HOOD140)

### Mounting

For mounting on top of posts, railings, etc. It is not suited for ground installation.

## Technical Information

### Standards

AS/NZS 61046

IP56/IP66 UL 1838

### LED

Cree XTE Plug and Play, field replaceable LED board.

**Lumen Output:** 120 at 700mA

**Lumens Per watt:** 60 minimum

**CRI Warm White (3000k):** 85+

**Colour Temp:** 2700K, 3000K and 4000K

**High CRI Option (3000K):** 90+ (lumen output decreases by 15%)

### Power Supply

#### Series (External) Driver

Constant current driver

Output: 3vdc at 700mA maximum

#### Integral 12 Volt Driver

Hunza™ Plug and Play Driver

Input: 12vac, 14 watt total

Output: 350 / 700mA