

Mini Bollard


Cat. No. BOLMINI



The Mini Bollard (95mm) is ideal for garden edges. The lens reflects light at two angles through an anti-glare mesh directly onto the ground and horizontally to illuminate the surrounding landscape.

Constructed of tubular aluminium with a UV stable powder coated finish or machined from solid copper or 316 stainless steel.

Ordering Information

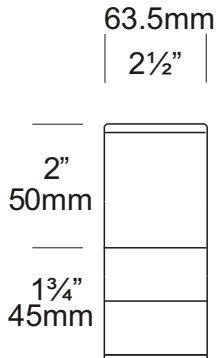

Luminaire Type

BOLMINI - Mini Bollard

Material/Finish

BK - Black
BZ - Bronze
GN - Green
STAR - Silver Star
WH - White
WB - Birch
DG - Dark Grey
OG - Olive Green
RG - Beige
PR - Primrose
COP - Copper
SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
HOOD140 - Anti Glare Hood
LENSBOLOP - Opaque Lens

For **LED** options, refer to page
10.4.1 (G4 JC LED),
10.4.6 (Wafer LED) or
<http://hunza.co.nz/l.html>



Ordering Example: BOLMINI BK - Mini Bollard in Black

HOOD140 BZ - Anti Glare Hood in Bronze

(Accessories ordered separately)

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") with chromate substrate and high UV resistant polyester powder coat.

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½").

316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½").

Mounting

For mounting on top of posts, railings, etc. It is not suited for ground installation.

Features

Lens:

UV stable acrylic with anti-glare mesh projects light horizontally and at 45° onto the ground.

Gasket:

Silicone, iron impregnated 220°c (428°f).

Lamp Holders:

G4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150)
Anti-Glare Hood - Not available in stainless steel (Cat. HOOD140).
Opaque Lens (Cat. LENSBOLOP).

Standards

IP66  UL1838

Luminaire Weight

Alum .37kg (13oz)
Cop .6kg (1lb 5oz)
SS .5kg (1lb 1oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with

G4 20 watt lamp max.

LED - Refer to previous page.

USA and Canada:

G4 20 watt lamp max.

LED - Refer to previous page.

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4