
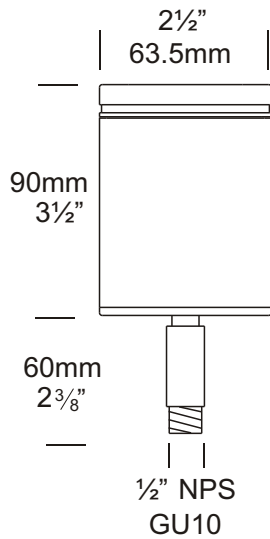


NPS Spot

Cat. No. NPS

Cat. No. NPSGU

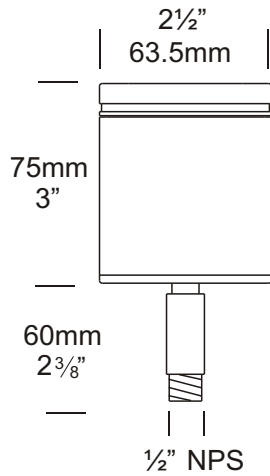

Shown with Tree Mount Adaptor

The NPS Spot is ideal for illuminating bushes and trees from ground level. The luminaire has been designed with a threaded 1/2" NPS base which can be easily fixed to a Hunza™ Super Spike ground stake, Hunza™ Tree Mount Kit or any 1/2" NPS fitting. It has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation.

The luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

Ordering Information

Luminaire Type	Material/Finish	Accessories
NPS - NPS Spot	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP - Copper SS - 316 Stainless Steel	GG - Glare Guard HCL - Hex Cell Louvre Adaptor LENSSTEPF - Frosted Lens SSP/G - Hunza™ Super Spike SSP/T - Hunza™ Tree Mount Adaptor GU - GU10 Option For LED options, refer to page 10.4 (dedicated LED), 10.4.3 (6 watt), 10.4.4 (3 watt) or http://hunza.co.nz/l.html

Ordering Example: NPS BK - NPS Spot in Black
NPSGU BK - NPS Spot GU10 in Black

HCL COP - Hex Cell Louvre Adaptor in Copper
(Accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Mounting

Designed with a ½" NPS thread, this luminaire is easily fitted to a Hunza™ Super Spike or Hunza™ Tree Mount Adaptor. It also fits any ½" NPS threaded fitting.

Features

Lens:

10mm (3/8") clear flush fit shatter resistant glass. Lifetime Warranty.

Gaskets:

Silicone, iron impregnated 220°c (428°f).

Lamp Holder:

GU5.3 & GU10 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

Accessories:

Frosted Lens (Cat. LENSSTEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).

Hunza™ Super Spike (Cat. SSP/G).

Hunza™ Tree Mount Adaptor (Cat. SSP/T).

GU10 Option (Cat. GU).

Swivel:

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP66  UL1838

Luminaire Weight

Alum .450kg (15oz)
Cop 1.25kg (2lb 12oz)
SS .960kg (2lb 1oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with

MR16 GU5.3 20 or 35 watt lamp max.

GU10 - GU10 25 or 35 watt lamp max.

LED - Refer to previous page.










USA and Canada:

MR16 GU5.3 20 watt lamp max.

With a glare guard fitted, lamp wattage can be increased to 35 watts.

GU10 Halogen - Lamp not supplied

LED - Refer to previous page.

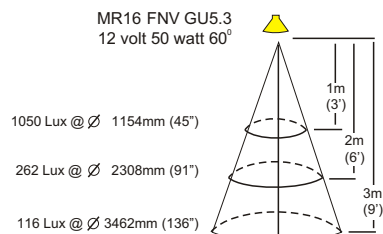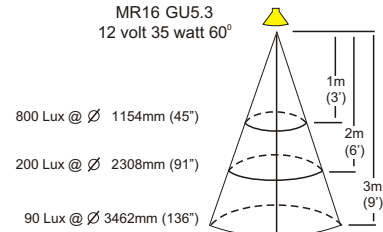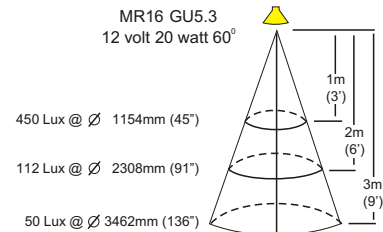

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4