



Pagoda Lite PURE LED

Cat. No. PGL/L.

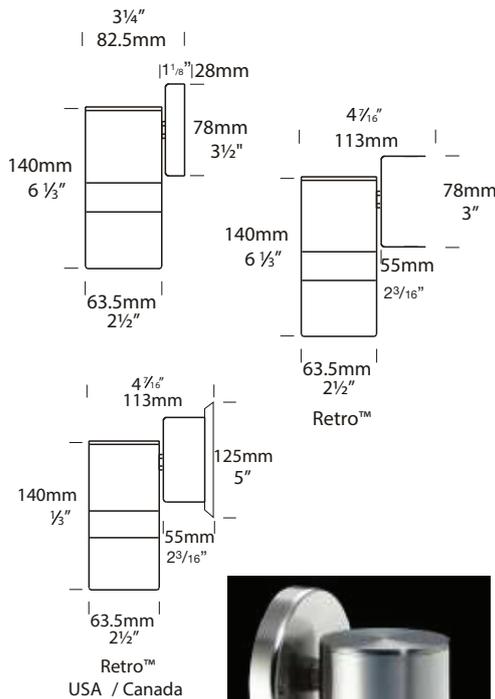

PURE LED
Pure Performance

The Pagoda Lite PURELED produces general illumination, suitable for area lighting on porches, patios, decks and entrance ways.

The lens is manufactured from high quality UV stable polycarbonate, with a stainless steel mesh lining to reduce glare. An opal frosted lens is also available as an option.

The Hunza PURELED system uses the latest Cree MTG-2 LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver, an integral Retro™ 110/240 volt driver or an external remote driver. The integral Retro driver has a 0-10 volt dimming function. PURELED incorporates an innovative Plug-and-Play system for easy replacement or upgrade of either the LED engine or integral driver.

The Retro™ version is ideal for installations where mounting an external power source is a problem, e.g. on a brick wall where there is no space to recess the driver. The base size increases in depth to accommodate the encapsulated IP66 dimmable driver.

*At 700mA this fitting is the equivalent of a 35w halogen fitting.

*At 1050mA this fitting is the equivalent of a 50w halogen fitting.

Ordering Information

Luminaire	Driver mA	Colour Temp	Accessories	Material/Finish
PGL/L	S - Series D3 - 12v/350mA D7 - 12v/700mA D10 - 12v/1050mA R - 110 or 240v Retro	2 - 2700K 3 - 3000K 4 - 4000K 39 - 3000k (90+ CRI)	LENSBOLOP - Opal Lens WBAP - Wall Box Adapt	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP-Copper SS-Stainless Steel

Ordering Example: PGL/L R 3 LENSBOLOP BK

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC Machined from one of the following metals:

Aluminium

Body: High corrosion resistant 63.5mm (2.5") x 10mm (25/64") aluminium.

Base & Mounting Plate: Cast from virgin high corrosion resistant CC401 low copper aluminium alloy with chromate substrate and high UV resistant polyester powder coat – Black, Bronze, Green, Silver Star, White, Birch, Dark Grey, Olive Green, Beige, Primrose.

Copper

Body: 63.5mm (2.5") x 10mm (25/64").

Base: Hand Spun Copper 2mm (5/64")

Mounting Plate: Forged Brass (Retro™)

Stainless Steel

Body: 63.5mm (2.5") x 9mm (11/32") rod

Base: Investment cast and CNC machined

Mounting Plate: Investment cast and CNC machined (Retro™)

Luminaire Weight

12 volt Alum: 0.510kg (1lb 1oz)
Cop: 1.220kg (2lb 11oz)
SS: 1.120kg (2lb 7oz)

Retro Alum: 0.840kg (1lb 13oz)
Cop: 1.500kg (3lb 4oz)
SS: 1.460kg (3lb 3oz)

Luminaire Features

Lens:

UV stable clear polycarbonate with stainless anti-glare mesh.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories:

Opal Lens (Cat.LENSBOLOP)
Wall Box Adaptor (Cat. WB)

Mounting

12 Volt: The luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3/0 and 4/0 junction boxes for USA/Canada.

Retro™ : A mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED (per head)

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 600 lm at 1050mA

Lumens Per watt: 85 minimum

CRI Warm White (3000k): 85+

Colour Temp: 2700, 3000 or 4000K

Power Supply

Series (Remote) Driver (per LED)

Constant current driver
LED requirements: 6vdc at 1050mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 14 watt total
Output: 350 / 700 / 1050mA
(1050mA limited ≤ 40° ambient temperature in Stainless Steel)

Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver

Retro 110 or 240 Volt Driver

Hunza™ Retro Driver

Input: 120 or 240vac, 10 watt total
Output: 700mA

0-10 volt dimming

(USA - non dimming)