# Euro Twin Wall Spot

Cat. No. ETWS
Cat. No. ETWS/R

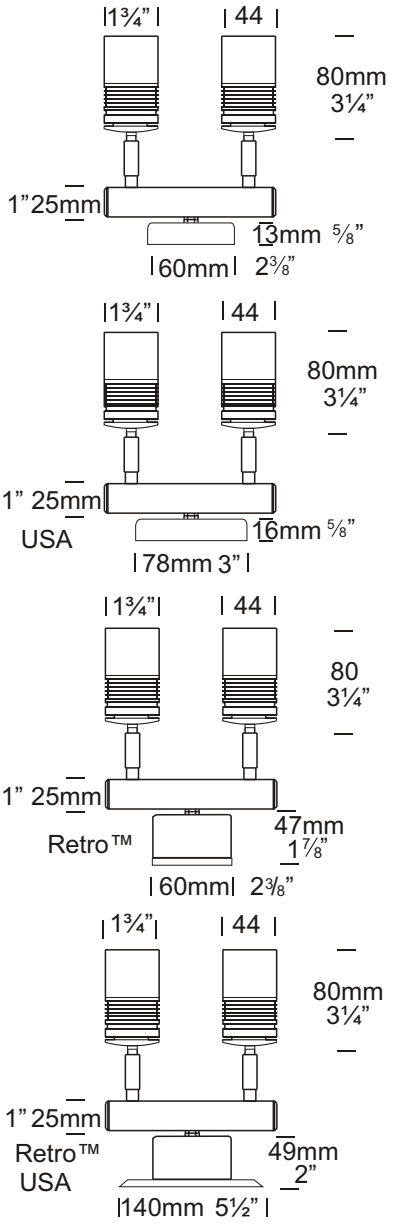

The Euro Twin Wall Spot is for situations where the luminaire needs to be discreet. The smaller sized MR11 lamp is utilised to achieve this. Each spotlight can be aimed in any direction. This luminaire has fully adjustable arms allowing 360 degree rotation and 0 - 90 degree elevation with a built-in glare guard. The Euro Twin Wall Spot has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

Ordering Information

| Luminaire Type | Material | Accessories |
|---|---|---|
| ETWS - Euro Twin Wall Spot | COP - Copper<br>SS - 316 Stainless Steel | LENSEURF - Frost Lens<br>CJK150 - Cable Joint Kit<br>/R - Retro™ Transformer 110/240-12 volt<br>WBAP - Wall Box Adaptor Plate (12 volt Luminaire) |

For **LED** options, refer to page 10.4.5 (2 watt MR11) or http://hunza.co.nz/l.html

Ordering Example: ETWS SS - Euro Twin Wall Spot in 316 Stainless Steel
ETWS/R COP - Euro Twin Wall Spot Retro™ in Copper

CJK150 - Cable Joint Kit
(Accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**
**130 Felton Mathew Ave**
**Glen Innes**
**Auckland 1072**
**New Zealand**

**Ph: 64-9-528 9471**
**Fax: 64-9-528 9361**
**hunza@hunza.co.nz**
**www.hunza.co.nz**

**INTERNATIONAL CONTACTS:**
**www.hunza.co.nz/contacts.php**

**Specifications may change without notice.**
**Manufactured in New Zealand.**
**© 2011 Hunza Holdings Ltd.**

**Ver 1.4**

## Luminaire Construction

CNC machined from one of the following metals:

**Body:**
Copper 45.4mm (1¾") rod.
**Base:**
Copper Hand spun 2mm (3/16")

**Body:**
316 Stainless steel 45.4mm (1¾") rod.
**Base:**
Investment cast and CNC machined.

## Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro™ luminaire (110/240-12 volt): a mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

## Features

### Lens:

6mm (¼") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

Lifetime Warranty.

### Gaskets:

Silicone, iron impregnated 220°c (428°f).

### Lamp Holders:

GU4 - 350°c (662°f) ceramic multi contact lamp holder with 180°c (356°f) silicone cables.

### Accessories:

Cable Joint Kit (Cat. CJK150)
Not approved for USA /Canada.
Frost Lens (Cat. LENSEURF).
Retro™ transformer 110/240-12 volt (Cat. /R).
Wall Box Adaptor Plate (Cat. WBAP 12 volt luminaires USA/Canada).

### Swivel:

Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

## Standards

IP66 AS/NZS 61046

UL1838

## Luminaire Weight

12 volt

Cop 1.445kg (3lb 2oz)

SS 1.245kg (2lb 11oz)

Retro™

Cop 2.006kg (4lb 6oz)

SS 1.730kg (3lb 13oz)

## Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

## RETRO™

HUNZA™ 110/240-12 volt ac potted electronic transformer built into the Retro™ base. Dimmable with a suitable dimmer.

## Lamp Type

MR11 GU4 - 2 x 20watt lamp max.
**LED** - Refer to previous page.

USA and Canada:
MR11 GU4 - 2 x 10watt lamp max.
**LED** - Refer to previous page.

MR11 GU4
12 volt 20 watt 10°

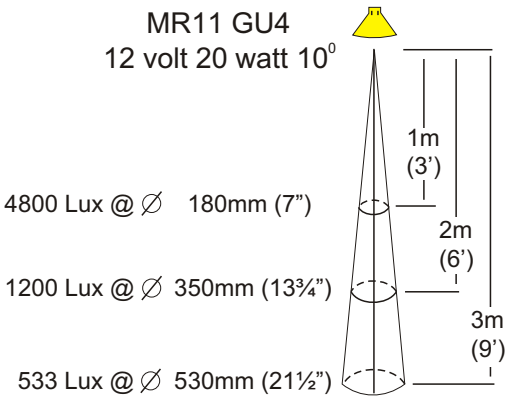


MR11 GU4
12 volt 20 watt 30°

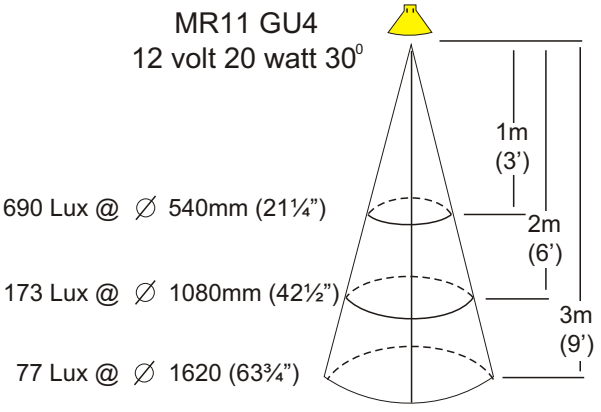


HUNZA™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**
**130 Felton Mathew Ave**
**Glen Innes**
**Auckland 1072**
**New Zealand**

**Ph: 64-9-528 9471**
**Fax: 64-9-528 9361**
**hunza@hunza.co.nz**
**www.hunza.co.nz**

**INTERNATIONAL CONTACTS:**
**www.hunza.co.nz/contacts.php**

**Specifications may change without notice.**
**Manufactured in New Zealand.**
**© 2011 Hunza Holdings Ltd.**

**Ver 1.4**