





# Spike Spot Adjustable

Cat. No. SS/A

Cat. No. SS/AGU



GU10



The Spike Spot Adjustable has been designed for easy installation into the earth and is ideal for illuminating a bush, tree or any landscape feature. The fully adjustable head allows 360 degree rotation and 0 - 90 degree elevation. This luminaire uses an MR16 GU 5.3 lamp.

This luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

## Ordering Information

### Luminaire Type

SS/A - Spike Spot Adjustable

### Material/Finish

- BK - Black
- BZ - Bronze
- GN - Green
- STAR - Silver Star
- WH - White
- WB - Birch
- DG - Dark Grey
- OG - Olive Green
- RG - Beige
- PR - Primrose
- COP - Copper
- SS - 316 Stainless Steel

### Accessories

- CJK150 - Cable Joint Kit
- LENSSTEPF - Frosted Lens
- GG - Glare Guard
- HCL - Hex Cell Louvre Adaptor
- /300 - Ground Spike 300mm (12")
- GU - GU10 Option

Ordering Example SS/A COP - Spike Spot Adjustable in Copper  
 SS/AGU COP - Spike Spot Adjustable GU10 in Copper

GG BK - Glare Guard in Black  
 (Accessories ordered separately)

**HUNZA**™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2011 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat

**Colours** Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Copper** 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

**316 Stainless Steel** 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

## Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

## Features

### Lens:

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

### Gasket:

Silicone, iron impregnated 220°C (428°F)

### Lamp Holder:

GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

### Accessories:

Cable Joint Kit (Cat. CJK150)  
Not approved for USA /Canada.

Frosted Lens (Cat. LENSSTEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).

300mm (12") Spike (Cat. /300).

GU10 Option (Cat. GU).

### Swivel:

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

## Standards

IP66  UL1838

## Luminaire Weight

Alum .490kg (1lb 1oz)  
Cop 1.240kg (2lb 11oz)  
SS 1.080kg (2lb 6oz)

## Power Supply

HUNZA™ Inground or Wall Mount  
Transformer: not included.

### USA and Canada:

HUNZA™ Wall Mount Transformer:  
not included.

### Luminaire: supplied with

MR16 GU5.3 20 or 35 watt lamp max.  
GU10 - GU10 25 or 35 watt lamp max.










**LED** - Refer to previous page.

### USA and Canada:

MR16 GU5.3 20 watt lamp max.  
GU10 Halogen - Lamp not supplied

**LED** - Refer to previous page.

With a glare guard fitted, lamp wattage can be increased to 35 watts.

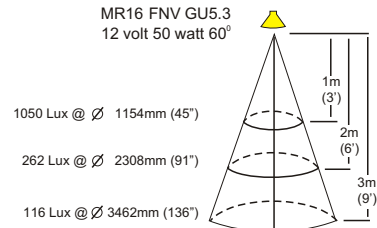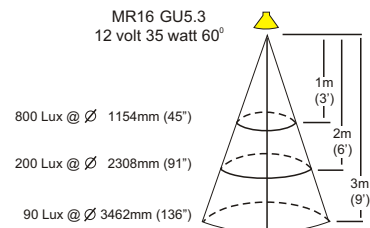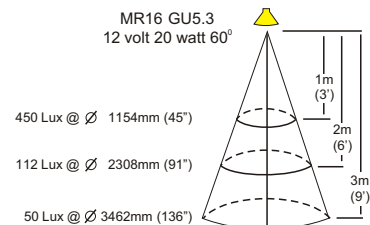

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.

Ver 1.4