


Euro Twin Pole PURE LED

Cat. No. ETPL/L



PURE LED
Pure Performance

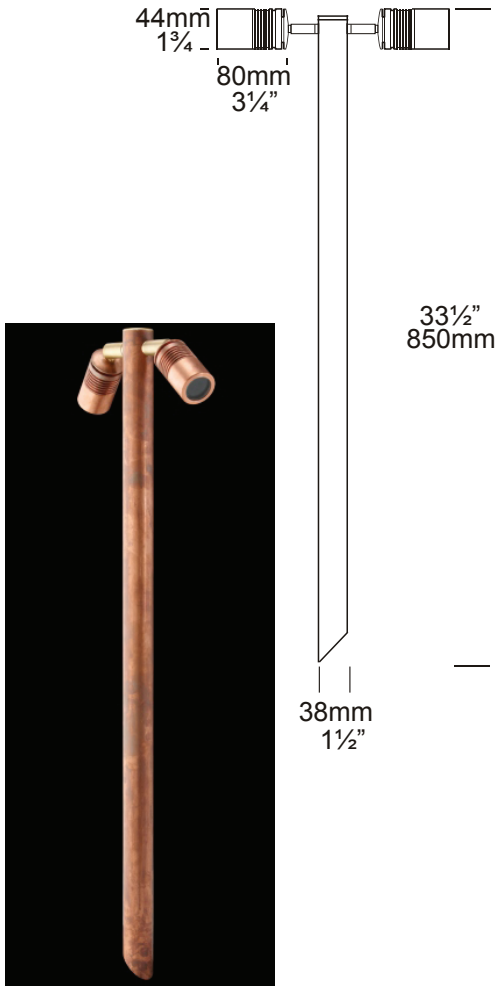

The Euro Single Pole Lite Pure LED is ideal for path lighting as well as tree lighting, or the head may be aimed downward to eliminate vertical light. The Hunza Euro fixtures have a contemporary, discreet appearance but are still able to provide excellent illumination. This luminaire has fully adjustable arms allowing 360 degree rotation and 0-90 degree elevation with a built in glare guard.

The Hunza PURE LED system uses the latest Cree MTG-2 chips for maximum performance and long life. Power supply options include a choice of integral 12 or 120/240 volt (Retro) drivers. There is also an external (series connection) remote driver. The PURE LED system incorporates an innovative Plug-and-Play system for an easy replacement or upgrade of either the LED engine or integral driver.

- * At 350mA this fitting is the equivalent of a 25w halogen fitting.
- * At 700mA this fitting is the equivalent of a 35w halogen fitting.

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
ETPL/L	S - Series D3 - 12v 350mA D7 - 12v 700mA R - 110 or 240v Retro	15 - 15° TIR Lens 25- 25° TIR Lens 38 - 38° TIR Lens 60 - 60° TIR Lens	2 - 2700K 3 - 3000K 4 - 4000K 39 - 3000K (90+ CRI)	CJK - Cable Joint Kit EURF - Frosted Lens FM - Flange Mount	COP - Copper SS - 316 Stainless

Ordering Example: ETPL/L S 38 3 CJK SS

HUNZA™
PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals

Copper

Body: 45.4mm (1 $\frac{3}{4}$ ") Copper rod.
Pole: 38mm (1 $\frac{1}{2}$ ") x 850mm (33 $\frac{1}{2}$ ") Copper tube.

316 Stainless Steel

Body; 45.4mm (1 $\frac{3}{4}$ ") Stainless Steel rod.
Pole: 38mm (1 $\frac{1}{2}$ ") x 850mm (33 $\frac{1}{2}$ ") Stainless Steel tube.

Retro™

Pole: 38mm (1 $\frac{1}{2}$ ") x 410mm (16") tube.
Driver Pole: 63.5mm (2 $\frac{1}{2}$ ") x 440mm (17 $\frac{1}{2}$ ") tube.

Luminaire Weight

12volt Cop 1.900kg (4lb 3oz)
SS 1.550kg (3lb 6oz)

Retro™ Cop 2.800kg (6lb 2oz)
SS 2.600kg (5lb 11oz)

Luminaire Features

Lens

6mm ($\frac{3}{8}$ ") extra clear low iron flush fit shatter resistant glass.
Lifetime Warranty.

Gasket

Silicone, iron impregnated 220°C (428°F)

Accessories

Cable Joint Kit (Cat. CJK150)
Frosted Euro Lens (Cat. EURF)
Flange Mount (Cat.FM38.1)

Swivels

Copper luminaires - 360° rotation and 0-90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0-90° elevation, full stainless steel construction.

Mounting

Pole 850mm (31 $\frac{1}{2}$ ") directly mounted into the earth.
Retro™ - set in concrete.

Flange Mount option for hard surfaces

Technical Information

Standards

AS/NZS 61046
IP67 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.
Lumen Output: 420 at 700mA
Lumens Per watt: 105 minimum
CRI Warm White (3000k): 85+
Colour Temp: 2700K, 3000K and 4000K
High CRI Option (3000K): 90+ (lumen output decreases by 15%) for use with integral 12 volt driver

Power Supply

External (Series) Driver (per head)

Constant current driver
Output: 6vdc at 700mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 5watt total
Output: 6vdc nominal, 350 / 700mA


Transformer

Hunza™ Wall Mount Transformer for use with integral 12v driver


Retro 110/240 Volt Driver

Hunza™ Retro Driver
Input: 120/240vac, 5watt total
Output: 6vdc, 700mA
0-10 volt dimming
(USA - non dimming)


Reflector Beam Angles



15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K